

T-2/R

TOWER MODULAR SPEAKER



A T-1/R atop a 1010-SE/R combine to create the reference-grade T-2/R. Increased audio quality and higher power handling are just two of the enhancements the T-2/R has over the T-2. The 1010-SE/R's long-throw subwoofers increase the T-2/R's bass accuracy and overall output capability.

Designed for overzealous listeners, the T-2/R is capable of satisfying the person who just can't seem to get enough of crystal clear, powerful sound. This model is only available in custom veneer finish.

R B HASSING
TM



REDEFINING THE WAY YOU EXPERIENCE SOUND.™

382 Marshall Way, Layton, Utah • USA • 84041 • Toll Free: (800) 543-2205 • Fax: (801) 543-3300 • www.rbhsound.com
It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. Copyright © 2010 RBH Sound. All Rights Reserved.

SPECIFICATIONS

MODEL NAME:

T-2/R

SYSTEM TYPE:

Tower Modular Speaker

SERIES

Signature Series T Systems

FREQUENCY RESPONSE

20Hz — 20kHz ± 3dB

SENSITIVITY

91dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

300-1000 Watts

DRIVE UNITS

- (2) 10" (254mm) Reference Aluminum Subwoofers
- (4) 6½" (165mm) Reference Aluminum Woofers
- (3) 1.1" (28mm) Reference Silk Dome Tweeters

CROSSOVER FREQUENCY

2,500 Hz

CROSSOVER

24dB/Octave

IMPEDANCE

4 Ohms

CABINET

Custom Veneers Only Choose From 30 Different Real Wood Finishes

GRILLE

Black Cloth

DIMENSIONS

13¼" W x 61¼" H x 18" D
(337mm W x 1556mm H x 457mm D)

WEIGHT

156 lbs. (70.76 kg)

WARRANTY

5 Years*

*Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.



R B HASSING


™

High Performance Home Audio
Redefining the Way You Experience Sound™


T-2/R

TOWER MODULAR SPEAKER

DIMENSIONS & CONFIGURATIONS

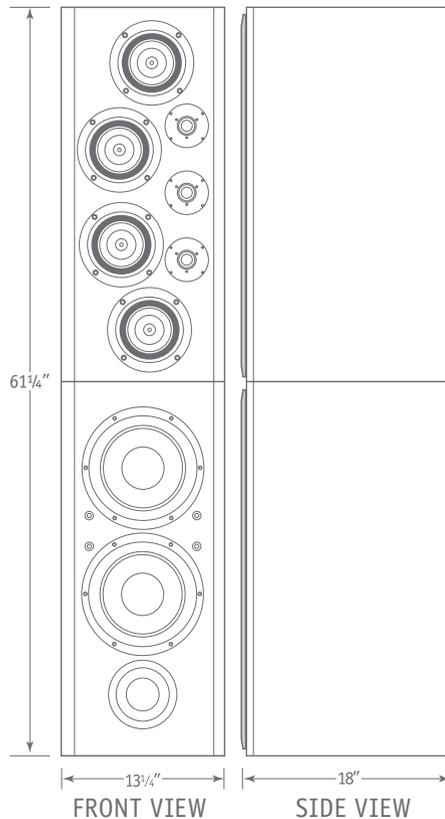

The mid-range and bass drive units of the T System are of the highest quality and feature cutting-edge aluminum cone technology. The two 10-inch long-throw subwoofers deliver plentiful amounts of low frequency information. Mid-bass through lower treble frequencies are accurately reproduced through four 6½-inch woofers offering extended dynamic range and lower distortion. Three 1-inch silk dome high performance tweeters provide generous crystal clear high frequencies with unbelievable detail and accuracy. The woofers and tweeters are arranged in a dispersion-averaging alignment that focuses the sound at the listening position for unbelievable imaging. Working in harmony, all drive units are governed by an extensive filter network to convey the sonic realism you'd expect from this reference-grade speaker system.

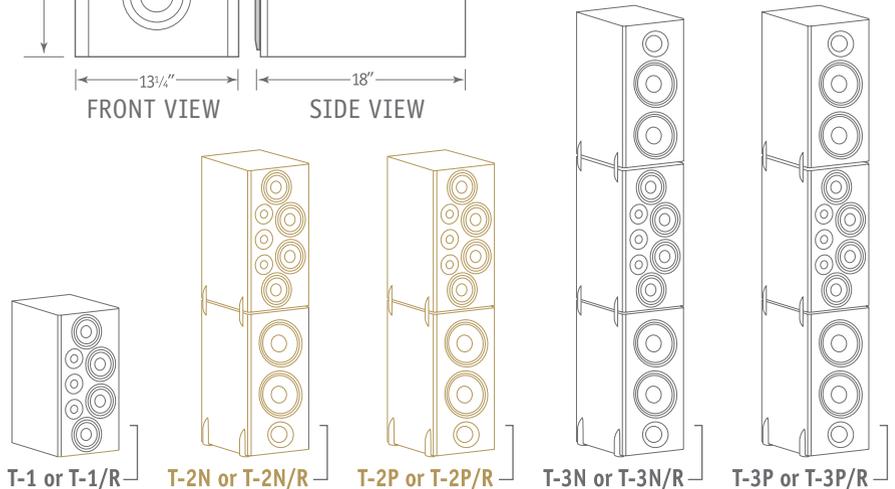

T-2N or T-2N/R:	2 each T-1 or T-1/R Modular Speakers 2 each 1010-SEN or 1010-SEN/R Non-powered Subwoofers 2 sets of T-Module Clamps 2 sets of T-Module Feet	T-3N or T-3N/R:	2 each T-1 or T-1/R Modular Speakers 4 each 1010-SEN or 1010-SEN/R Non-powered Subwoofers 4 sets of T-Module Clamps 2 sets of T-Module Feet
T-2P or T-2P/R:	2 each T-1 or T-1/R Modular Speakers 2 each 1010-SEN or 1010-SEN/R Non-powered Subwoofers 2 each SA-400 Subwoofer Amplifiers 2 sets of T-Module Clamps 2 sets of T-Module Feet	T-3P or T-3P/R:	2 each T-1 or T-1/R Modular Speakers 4 each 1010-SEN or 1010-SEN/R Non-powered Subwoofers 4 each SA-400 Subwoofer Amplifiers 4 sets of T-Module Clamps 2 sets of T-Module Feet

Specifications are subject to change. For the most current information visit us online at www.rbhsound.com.