

SX-1212N

NON-POWERED SUBWOOFER



The SX-1212N combines style with brute strength and precision. Dual 12-inch aluminum cone woofers and a bottom-firing vent work in unison to outperform subwoofers costing much more. The SX-1212N non-powered subwoofer is designed to be used with an outboard subwoofer amplifier. As part of the Signature SX Series configuration, the SX-1212N is designed to support larger home theaters.



REDEFINING THE WAY YOU EXPERIENCE SOUND.™

382 Marshall Way, Layton, Utah • USA • 84041 • Toll Free: (800) 543-2205 • Fax: (801) 543-3300 • www.rbhsound.com
It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. Copyright © 2013 RBH Sound. All Rights Reserved.

SPECIFICATIONS

MODEL NAME

SX-1212N

SYSTEM TYPE

Passive Subwoofer (Non-powered)

SERIES

Signature SX Series

FREQUENCY RESPONSE

25Hz-200Hz \pm 3dB

SENSITIVITY

93dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

200-500 Watts

DRIVE UNITS

(2) 12" (305mm) Aluminum Subwoofers

IMPEDANCE

4 Ohms

CABINET

Medium Density Fiberboard (MDF) in a Standard Satin Black Oak or Sandalwood, or 30 Different Custom Veneer Finishes

GRILLE

Black Cloth

DIMENSIONS

17-3/4" W x 39" H x 22" D
(451mm W x 959mm H x 559mm D)

WEIGHT

110 lbs. (49.90 kg)

WARRANTY


5 Years*

* Warranted from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.

SX-1212N

NON-POWERED SUBWOOFER

DIMENSIONS

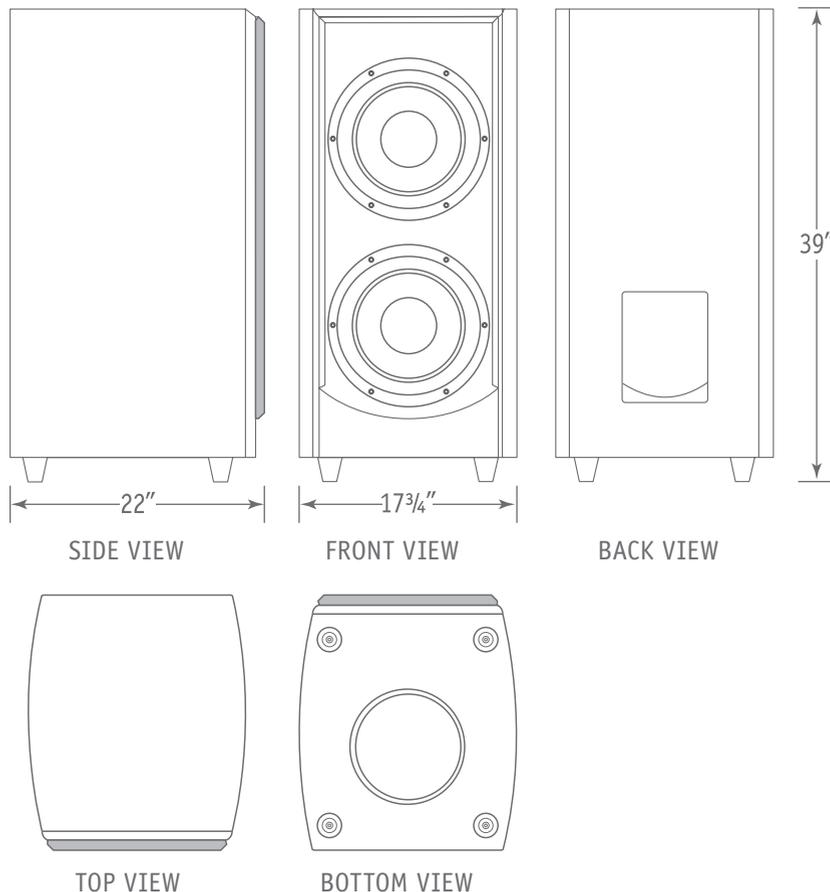

MATCHING SERIES

BOOKSHELF: SX-661, SX-61

CENTER CHANNELS: SX-6100C, SX-661C, SX-441C

SURROUND CHANNEL: SX-44

TOWERS: SX-T1, SX-T2, SX-T3, SX-8300, SX-6300

SUBWOOFER: SX-10, SX-1010N, SX-1010P, SX-12, SX-1212P, SX-88

Most speakers are also available in Reference version.



High Performance Home Audio
Redefining the Way You Experience Sound™

Specifications are subject to change. For the most current information visit us online at www.rbhsound.com.