

1044-SE

TOWER SPEAKER



RBH Sound designed the 1044-SE for those who want big sound from a small profile. The 1044-SE's rear-ported design has a driver complement of two 4-inch aluminum cone mid-range woofers, a 1-inch silk dome tweeter, and a side-firing 10-inch aluminum cone subwoofer. This driver complement allows the 1044-SE to deliver all the impact of a larger profile speaker while maintaining its small footprint. Even higher fidelity and performance can be obtained by bi-wiring or bi-amplifying the 1044-SE through its dual gold-plated terminals. Shown here in standard olive ash burl, this model is only available in custom veneers.

R B HASSING
TM

rbh
TM

REDEFINING THE WAY YOU EXPERIENCE SOUND.™

382 Marshall Way, Layton, Utah • USA • 84041 • Toll Free: (800) 543-2205 • Fax: (801) 543-3300 • www.rbhsound.com
It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. Copyright © 2008 RBH Sound. All Rights Reserved.

SPECIFICATIONS

MODEL NAME

1044-SE

SYSTEM TYPE

Tower Speaker

SERIES

Signature Series

FREQUENCY RESPONSE

30Hz — 20kHz ± 3dB

SENSITIVITY

88dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

100-250 Watts

DRIVE UNITS

(1) 10" (254mm) Aluminum Subwoofer

(2) 4" (102mm) Aluminum Woofers

(1) 1" (25mm) Silk Dome Tweeter

TWEETER PROTECTION

Yes

CROSSOVER FREQUENCY

100 Hz, 3,000 Hz

CROSSOVER

24dB/Octave

IMPEDANCE

4 Ohms

CABINET

30 Different Real Wood Finishes

GRILLE

Black Cloth

DIMENSIONS

6 $\frac{3}{4}$ " W x 42" H x 15 $\frac{1}{2}$ " D

(171mm W x 1067mm H x 394mm D)

WEIGHT

58 lbs. (26.31 kg)

WARRANTY

5 Years*

*Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.



R B HASSING


TM

High Performance Home Audio
Redefining the Way You Experience Sound™

1044-SE

TOWER SPEAKER

DIMENSIONS

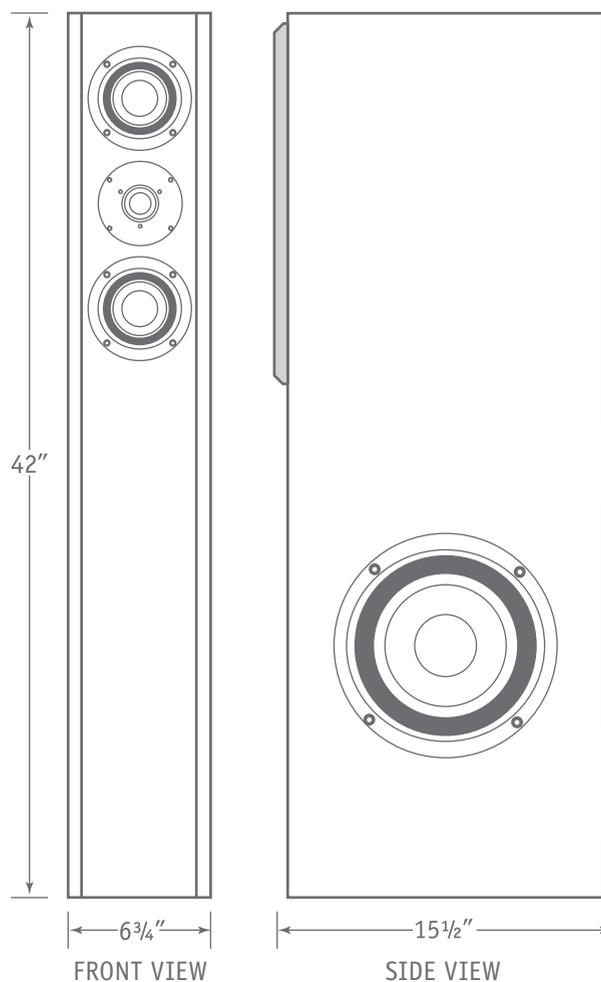

MATCHING SPEAKERS

BOOKSHELF: 41-SE, 61-SE, 661-SE

CENTER CHANNELS: 441-SE, 661-SE, 6100-SE

SURROUND CHANNEL: 44-SE, 66-SE

TOWER: 641-SE, 1266-SE, 8300-SE

SUBWOOFER: 1010-SE