

A-605/70

IN-CEILING SPEAKER



The A-605/70 is the budget-minded answer for both residential and commercial in-ceiling speaker applications. The A-605/70 employs a polygraphite woofer cone and a soft dome tweeter for great sound on a budget. Other amenities include a UL listed integral rear enclosure and a built-in multi-tap transformer, enabling the A-605/70 to be used with either 8 Ohm or 70/100 Volt audio systems. The A-605/70 provides full-range performance while exceeding building code compliance.

R B HASSING
TM



REDEFINING THE WAY YOU EXPERIENCE SOUND.™

382 Marshall Way, Layton, Utah • USA • 84041 • Toll Free: (800) 543-2205 • Fax: (801) 543-3300 • www.rbhsound.com
It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. Copyright © 2009 RBH Sound. All Rights Reserved.

SPECIFICATIONS

MODEL NAME:

A-605/70

SYSTEM TYPE:

In-ceiling 2-way Speaker
(8 Ohm 70/100 Volt Ready)

SERIES

Architectural Series

FREQUENCY RESPONSE

58Hz — 20kHz \pm 3dB

SENSITIVITY

88dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

2-60 Watts¹

DRIVE UNITS

(1) 6½" (165mm) PolyGraphite Cone Woofer
(1) ¾" (19mm) Silk Dome Tweeter

TWEETER PROTECTION

Yes

CROSSOVER FREQUENCY

3,000 Hz

CROSSOVER

12dB/Octave

IMPEDANCE

8 Ohm 70/100 Volt¹

CABINET

White Frame (paintable)

GRILLE

White (paintable)

CUTOUT DIMENSIONS

8" (203mm) Diameter

FINISHED DIMENSIONS

9-1/8" Diameter x 4-1/2" D
(232mm Diameter x 114mm D)

WEIGHT

4 lbs. (1.81 kg)

WARRANTY

25 Years*



R B HASSING


™

High Performance Home Audio
Redefining the Way You Experience Sound™


A-605/70

IN-CEILING SPEAKER


DIMENSIONS

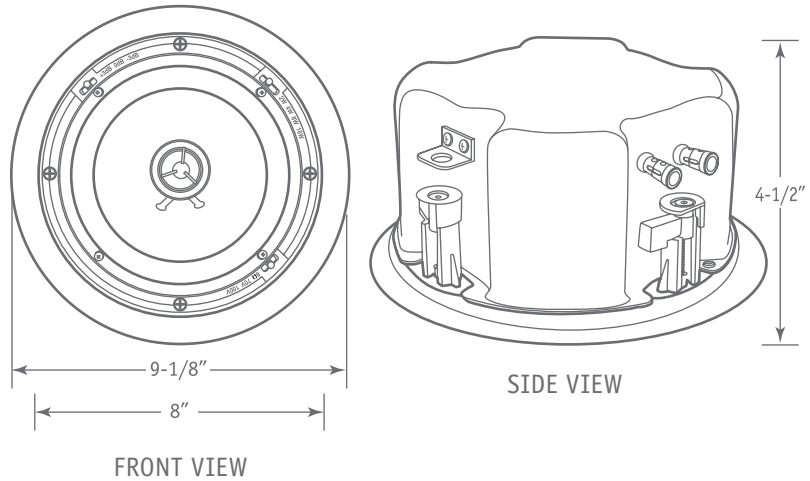


SWITCHES



Switch for 70/100 Volt
or 8 Ohms Operation.



Switch for Watt Taps in
70/100 Volt Operation.



Switch for Tweeter
Adjustment.

*Warranted for 25 (twenty-five) years from date of purchase to be free from defects and workmanship.

For more information see your RBH dealer.

¹ 70/100 Volt Operation: 70/100 volt Taps 2, 4, 8 and 16 Watts.

Specifications are subject to change. For the most current information visit us online at www.rbhsound.com.