



**Redefining the way
you experience sound.™**

WM-24

On-wall Loudspeaker

Applications:

The WM-24 on-wall loudspeaker features RBH's proprietary aluminum cone technology and is designed to be mounted directly to a wall. Mounted on the wall, the WM-24 is a mere 3¾-inches deep and exemplifies the perfect marriage between performance and aesthetics. The WM-24 is a fantastic solution for small-to-mid sized home theaters and media rooms featuring a flat-panel television or monitor.


Technical Information:

- Model Name/Number:** WM-24
Primary Use: On-wall LCR (Left/Center/Right)
Series: M Series
System Type: 2-way Acoustic Suspension
Frequency Response: 50Hz — 20kHz ± 3dB
Sensitivity: 90dB (2.83 Volts @ 1 Meter)
Recommended Power: 80-120 Watts
Drive Units: (2) 4" Aluminum Cone Woofers (active)
(2) 4" Aluminum Cone Woofers (passive)
(1) 1" Silk Dome Tweeter
Tweeter Protection: Yes
Swivel Tweeter: No
Crossover Frequency: 3000 Hz
Crossover Slope: 12dB/Octave
Impedance: 6 Ohms
Color: Brushed Aluminum/Black
Grille: Black/Silver (interchangeable)
Installation Bracket: Included
New Construction Bracket: N/A
Rear Enclosure: N/A
Finished Dimensions: 7" W x 24" H x 3¾" D*
Cut-out Dimensions: N/A
Weight: 9½ Lbs.
Warranty: 5 Years**

*Includes wall-mount bracket
**Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.



Frequency Response Graph:

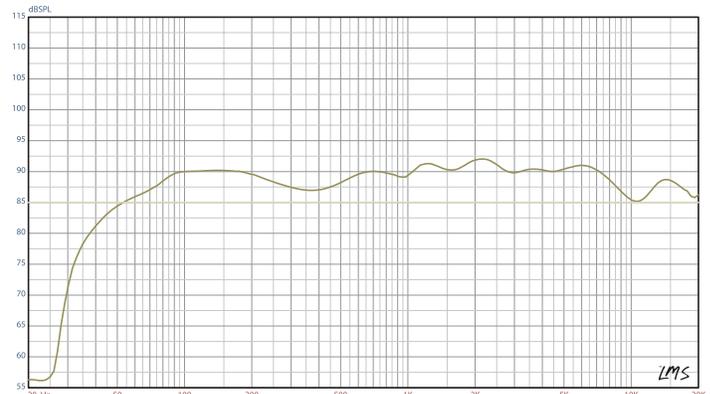

RBH Sound

Layton, Utah • USA
(800) 543-2205 • www.rbhsound.com